


Farm Mortality Refrigeration System

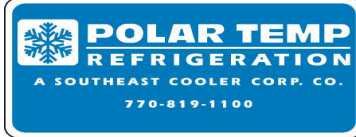

404-583-8217 GA
770-819-1100 Plant
866-598-4206 TX
316-683-5863 KS

Serving farms
across the
USA

bdallman@secooler.com
ereyan@polartemp.com
polartemp@att.net
dknapp@secooler.com

GA
Plant
TX
KS

Protective
Coating on
Evaporator
Coils



Harsh
Environment
Fans



Replaceable
Condenser
Air
Filter



Digital Electronic Control

Standard Refrigeration Feature Description:

- Defrost is hot gas system initiated by the electronic control and preset at the factory.
- Evaporator is coated with a synthetic polyelastomer over aluminum fin and copper tube assembly.
- Evaporator fan motors are rated for harsh environment.
- Control is electronic digital readout indicating power on, temperature and defrosts cycles.
- System is designed to operate between 4° F (-16° C) and 23° F (-5° C) pending ambient temperatures. Product temperature will vary.
- System operates without defrost drain tube to expel condensation allowing product chamber drain opening to be sealed.
- Refrigeration fits into opening size: 18 1/4" front to back x 26 1/4" side to side FMU50D6
- Refrigeration fits into opening size: 17" front to back x 24 3/4" side to side FMU50D4
- 120 volt - 60 hz - 1 ph , 20 amp circuit

Standard Component Feature Description:

- Exterior top platform is Stainless Steel
- Hood is galvanized pre-painted white steel.
- Condenser air filter will be replaceable and/or washable.
- Mounting brackets and bolts that attach the system to the mating chamber are provided.